




# Huawei P9 Loudspeaker Replacement

Replace the loudspeaker in your Huawei P9 smartphone.

Written By: Dominik Schnabelrauch

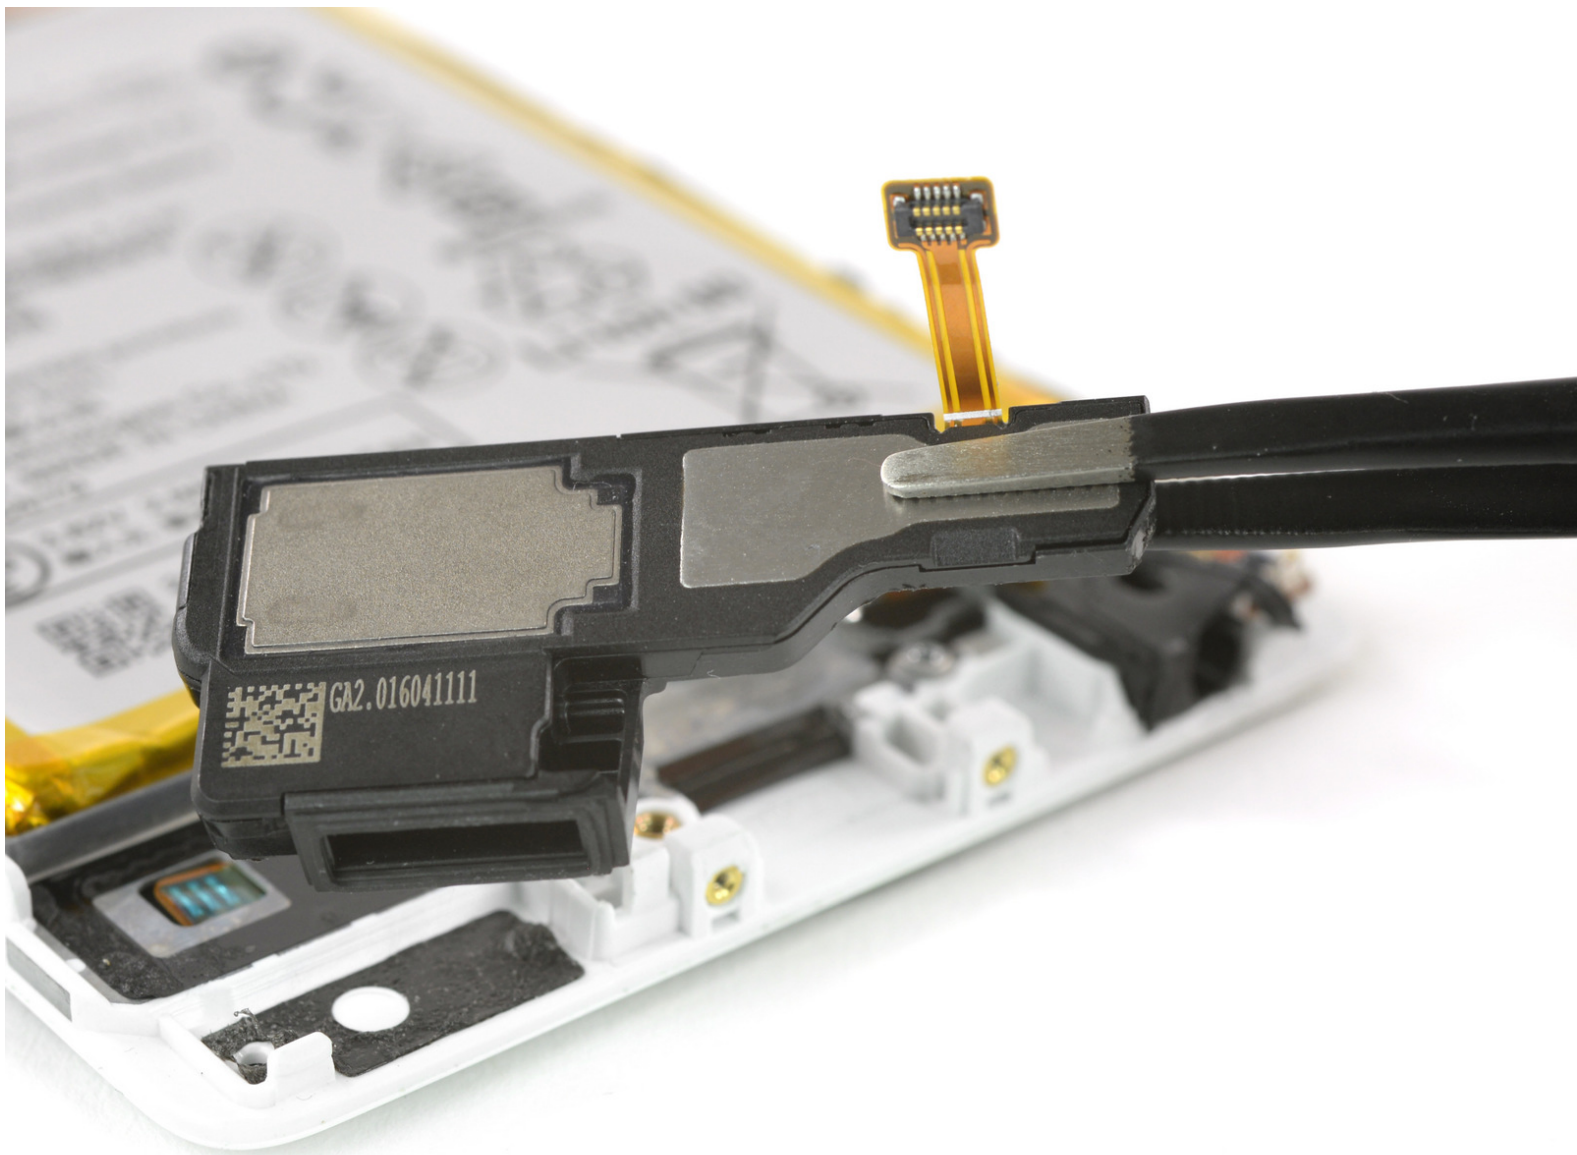

## INTRODUCTION

Use this guide to replace the loudspeaker in your Huawei P9 smartphone.

---



### TOOLS:

- [SIM Card Eject Tool](#) (1)
  - [Spudger](#) (1)
  - [Tweezers - Pro/ESD/Angled](#) (1)
  - [Phillips #000 Screwdriver](#) (1)
  - [iSclack](#) (1)
  - [P2 Pentalobe Screwdriver iPhone](#) (1)
-

## Step 1 — Back Cover




- First switch off your phone and remove the SIM card tray.
- Unscrew the two Pentalobe P2 screws located at the bottom next to the device's USB C port.
- ⓘ If the screen is cracked you might want to use some tape to protect your eyes from glass shreds and get a better grip to open the phone.

## Step 2




- Use an iSclack or a suction handle to separate the display unit from the rear panel.
- ⚠ Don't remove the rear panel completely yet. There is a cable connected to it! It is running from the finger print sensor to the display unit.

### Step 3 — finger print sensor

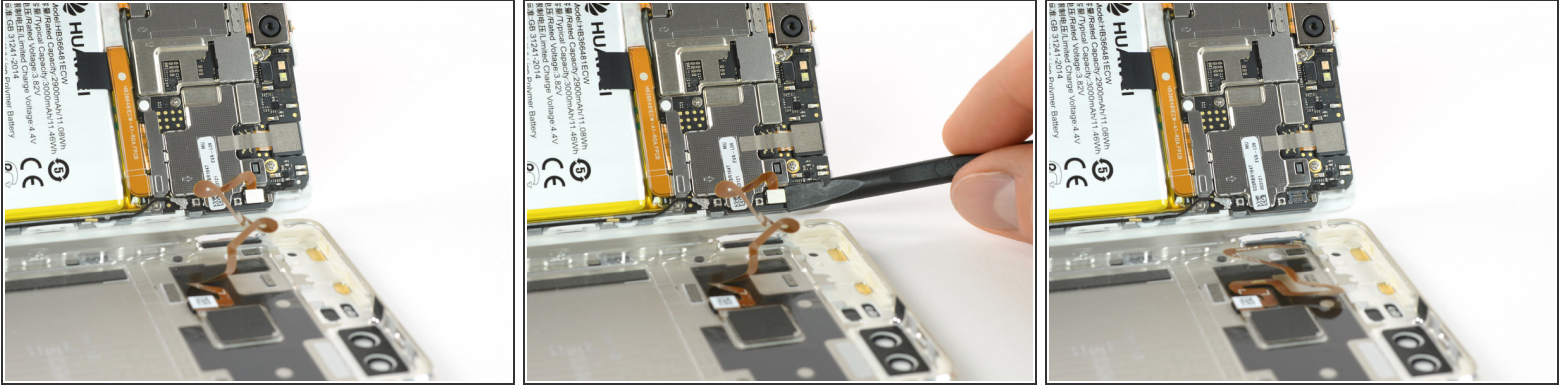

- Disconnect the finger print sensor using a spudger.


### Step 4 — lower section

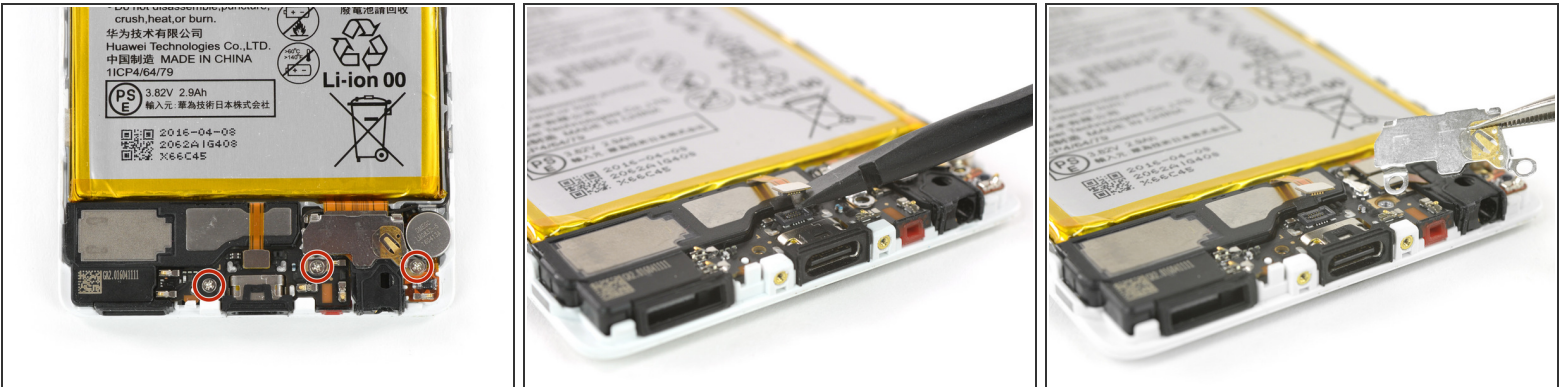

- Undo the three Phillips #000 screws.
- Disconnect the loudspeaker flex connector.
- Remove the metal bracket (mind the adhesive underneath).




## Step 5

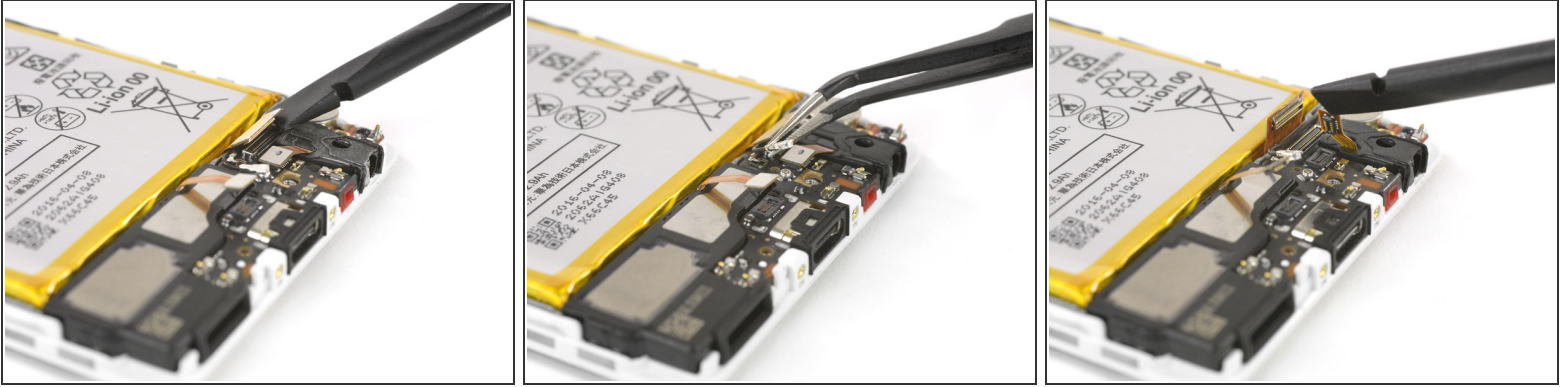

- Disconnect the motherboard flex cable and the antenna cable.
- Unplug the headphone jack connector.

## Step 6 — Loudspeaker

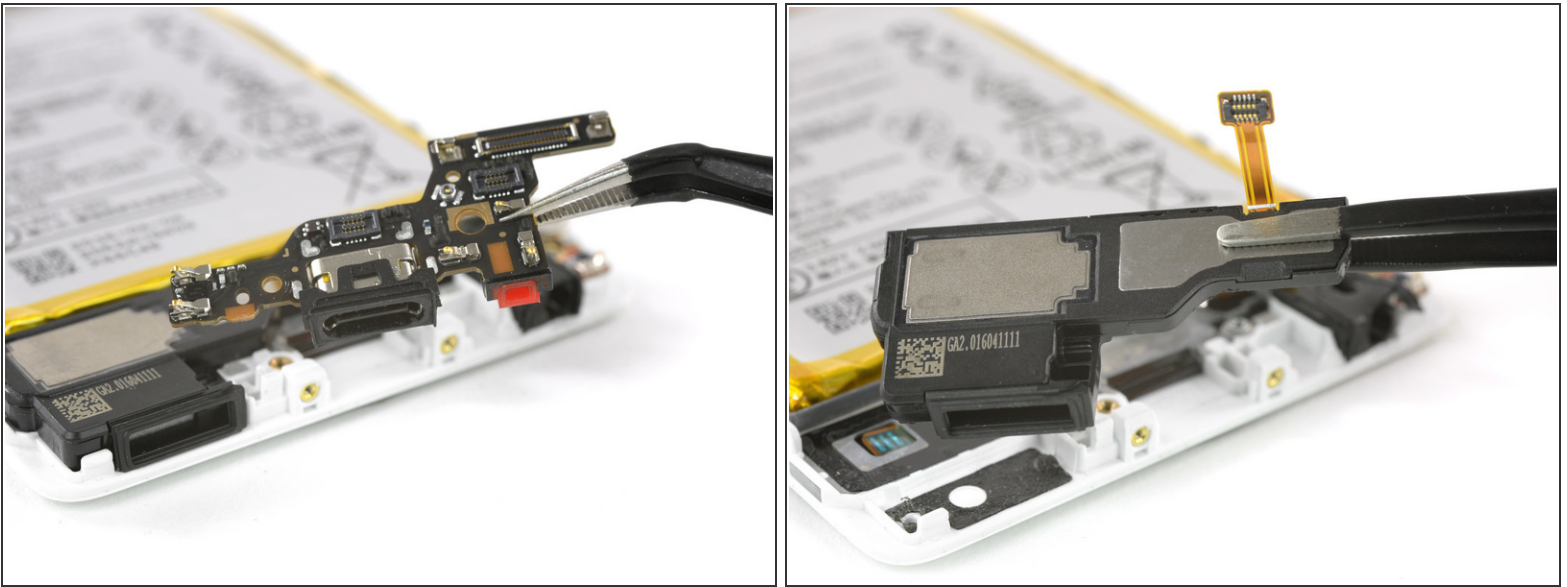

- Take away the charging board.
- Now you can remove the loudspeaker (mind the adhesive underneath)!

To reassemble your device, follow these instructions in reverse order.